



UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 CFR 1.53(b))</small>	Attorney Docket No.	192909US2
	First Inventor or Application Identifier	Fumio KOYAMA
	Title	COLOR CORRECTION IN IMAGE DISPLAY

APPLICATION ELEMENTS <small>See MPEP chapter 600 concerning utility patent application contents</small>	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
<p>1. <input checked="" type="checkbox"/> Fee Transmittal Form (e.g. PTO/SB/17) <small>(Submit an original and a duplicate for fee processing)</small></p> <p>2. <input checked="" type="checkbox"/> Specification Total Pages 26</p> <p>3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) Total Sheets 10 (Formals)</p> <p>4. <input type="checkbox"/> Oath or Declaration Total Pages <input type="text"/> a. <input type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. §1.63(d)) <small>(for continuation/divisional with box 15 completed)</small> i. <input type="checkbox"/> DELETION OF INVENTOR(S) <small>Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §1.63(d)(2) and 1.33(b).</small></p> <p>5. <input type="checkbox"/> Incorporation By Reference <small>(usable if box 4B is checked)</small> <small>The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4B, is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</small></p>	ACCOMPANYING APPLICATION PARTS <p>6. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))</p> <p>7. <input type="checkbox"/> 37 C.F.R. §3.73(b) Statement <input type="checkbox"/> Power of Attorney <small>(when there is an assignee)</small></p> <p>8. <input type="checkbox"/> English Translation Document <small>(if applicable)</small></p> <p>9. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations</p> <p>10. <input type="checkbox"/> Preliminary Amendment</p> <p>11. <input checked="" type="checkbox"/> White Advance Serial No. Postcard</p> <p>12. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application. Status still proper and desired.</p> <p>13. <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) (1) <small>(if foreign priority is claimed)</small></p> <p>14. <input checked="" type="checkbox"/> Other: Notice of Priority, List of Inventor's Name and Address</p>
<p>15. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below:</p> <p><input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application no.: Prior application information: Examiner: Group Art Unit:</p>	
<p>16. Amend the specification by inserting before the first line the sentence:</p> <p><input type="checkbox"/> This application is a <input type="checkbox"/> Continuation <input type="checkbox"/> Division <input type="checkbox"/> Continuation-in-part (CIP) of application Serial No. Filed on</p> <p><input type="checkbox"/> This application claims priority of provisional application Serial No. Filed</p>	
<p align="center">17. CORRESPONDENCE ADDRESS</p> <p align="center"> 22850 (703) 413-3000 FACSIMILE: (703) 413-2220</p>	

Name:	Marvin J. Spivak	Registration No.:	24,913
Signature:		Date:	6/13/00
Name:	C. Irvin McClelland Registration Number 21,124	Registration No.:	

TITLE OF THE INVENTION

COLOR CORRECTION IN IMAGE DISPLAY

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to an image display for displaying color images.

Description of the Related Art

 Various types of displays have been developed for displaying color images, including the direct viewing and projection types. The direct
10 viewing display uses a liquid crystal panel, plasma display panel (PDP), CRT or the like to display an image that the viewer views directly. The projection display is equipped with a projection lens, various optical systems and a display device such as a liquid crystal panel, digital micromirror device (DMD, trademark of Texas Instruments Inc.) or CRT.
15 An image formed on the display device is projected onto a screen, for instance, for viewing.

 Ideally, the image displayed by a color display is uniform, i.e., totally free of unevenness. Actually, however, unevenness sometimes arises in the displayed image for reasons that will now be discussed.

20 When a liquid crystal panel is used as the display device, image data are applied to the individual pixels of the liquid crystal panel to vary the transmittance and reflectance of the pixels with respect to illumination light projected onto the panel. The light projected onto the panel exits from the panel as image-bearing light. To ensure that images are
25 displayed with no unevenness, the transmittance and reflectance characteristics of the liquid crystal should be the same at every pixel. In an actual liquid crystal panel, however, they vary to some extent. The color of the displayed image is therefore sometimes uneven. Color

unevenness also occurs when other types of display devices are used, owing to non-uniformity of the various display device characteristics.

Display devices like the liquid crystal panel and the digital micromirror device require a separate optical system for projecting illumination light. Color unevenness may be produced in the displayed image depending on the luminance and color distribution of the light from the illumination optical system.

In the case of a projection display, color unevenness sometimes arises in the displayed image for reasons related to the characteristics of the display's various optical systems.

SUMMARY OF THE INVENTION

Accordingly, an object of the present invention is to provide a technology for suppressing color unevenness in displayed images.

In order to attain at least one of the above and other objects of the present invention, there is provided an image display apparatus. The apparatus comprises: an image processor for outputting image data including plural color component data; a gain corrector for correcting levels of the image data output by the image processor; and an image display device having a plurality of pixels from each of whose pixels light for forming an image exits in accordance with the corrected image data corrected by the gain corrector. The gain corrector corrects the level of at least one of the plural color component data applied to the pixels in accordance with the positions of the pixels such that, when image data representing an image of a uniform color are output from the image processor, difference in chromaticity of light exiting from the pixels is reduced among the pixels without making luminance of the light exiting from the pixels of the image display device the same at all pixels.

The image display apparatus can reduce color unevenness of the displayed image because, when the image processing unit outputs image data representing a uniform image of a prescribed color, the level of the image data applied to the individual pixels in accordance with their positions in the image display device is corrected to reduce difference in chromaticity of exiting light among the pixels.

In one embodiment, the gain corrector corrects the levels of all but a specific one of the plural color component data applied to the pixels to reduce difference in level between the specific color component data and the other color component data.

This configuration reduces difference in chromaticity of exiting light among the pixels without making the luminance of the light exiting from the pixels of the image display device the same at all pixels.

The specific color component data may be the type of color component data that makes the greatest contribution to the luminance of the light for forming the image.

This configuration suppresses color unevenness while also suppressing to some extent scatter in the luminance of the light for forming the image-bearing light exiting from the pixels.

When the plural color component data are red, green and blue component data and the specific color component data may be the green component data.

Among red, green and blue, green makes the greatest contribution to luminance. This configuration therefore suppresses color unevenness while also suppressing to some extent scatter in the luminance of the light for forming the image-bearing light exiting from the pixels.

The plurality of pixels may be segmented into a plurality of small areas of polygonal shape. In this case, correction values for apex pixels

corresponding to apexes of the small blocks are determined in advance, and correction values of pixels other than the apex pixels in each small areas are interpolated from the correction values of the apex pixels of the small area.

5 This configuration enables the correction values of the pixels in each small area to be interpolated from apex pixel correction values calculated in advance. The number of pixels whose correction values are calculated in advance can therefore be reduced. As a result, the operations for calculating correction values in advance can be simplified and the device
10 for storing the data representing the calculated correction values can also be simplified.

 The plurality of pixels may segmented into the plurality of small areas by drawing a horizontal line through a center pixel among the multiple pixels, drawing a vertical line through the center pixel, and
15 drawing the sides of a rhombus whose apexes are the extremities of the horizontal line and the vertical line.

 Color unevenness generally has a distribution spreading from the center to the periphery of the image. This configuration effectively suppresses color unevenness distributed in this manner.

20 The present invention can be implemented in various ways, such as image display apparatus and method, a computer program therefor, a computer program product including the computer program, a data signal embodied in a carrier wave including the computer program.

 These and other objects, features, aspects, and advantages of the
25 present invention will become more apparent from the following detailed description of the preferred embodiments with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram schematically illustrating an image display 1000 that is a first embodiment of this invention.

Fig. 2 is a block diagram schematically illustrating a gain corrector 120.

5 Figs. 3(A) and 3(B) show color unevenness correction.

Fig. 4 is a block diagram schematically illustrating a gain corrector of an image display that is a second embodiment of this invention.

Fig. 5 shows division of areas.

10 Figs. 6(A) and 6(B) show conditions used to discriminate whether a pixel position (x, y) output by a correction timing controller 210 is present in a first area or a second area.

Figs. 7(A) and 7(B) show gain calculation for pixels present in first and second areas conducted in a gain calculator 270.

15 Fig. 8 is diagram concerning the areas for explaining examples of correction gain interpolation equations and constants stored in a constant table 220A.

Figs. 9(A) and 9(B) show other area division patterns.

Fig. 10 shows still another area division pattern.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 A. First embodiment:

Fig. 1 is a block diagram schematically illustrating an image display 1000 that is a first embodiment of this invention. The image display 1000 comprises a scan converter (SC) 110, a gain corrector 120, a controller 130, a liquid crystal panel driver 150, liquid crystal panels 160, an illumination 25 optical system 170 and a projection optical system 180. The image display 1000 is a projector which displays images by projecting red, green and yellow light exiting from the liquid crystal panels 160 at every pixel onto a projection screen SR through the projection optical system 180.

crystal panel 160 onto the projection screen SR, thereby displaying an image.

The liquid crystal panel 160 thus corresponds to the image display device of the present invention, while the SC 110 corresponds to the image processor of the invention and the gain corrector 120 corresponds to the gain corrector of the invention.

Fig. 2 is a block diagram schematically illustrating the gain corrector 120. The gain corrector 120 comprises a correction timing controller 210, a constant table 220, a constant selector 230, a red multiplier 240 and a blue multiplier 250. The constant table 220 stores red and blue correction gains $gr(x, y)$ and $gb(x, y)$ for each pixel. As shown in Fig. 3(A), the position of each pixel of the liquid crystal panel, which comprises multiple pixels in a matrix array, is defined by the value of (x, y) in an orthogonal coordinate system whose origin $(0, 0)$ is defined as the pixel at the left edge in the horizontal direction and the upper edge in the vertical direction; x represents position in the horizontal direction and y position in the vertical direction.

The correction timing controller 210 uses the given timing signal TCTL to calculate the position (x, y) of the pixel to which the image data DS received from the SC 110 is to be applied. The constant selector 230 selects the correction gains $gr(x, y)$, $gb(x, y)$ corresponding to the calculated pixel position (x, y) from the constant table 220 and supplies the red correction gain $gr(x, y)$ to the red multiplier 240 and the correction gain $gb(x, y)$ to blue multiplier 250.

The red multiplier 240 multiplies the input red image data $DS(R)$ by $gr(x, y)$ and outputs the product as red image data $DCS(R)$. The blue multiplier 250 multiplies the input blue image data $DS(B)$ by $gb(x, y)$ and

outputs the product as blue image data DCS(B). The green image data DS(G) is output unchanged as image data DCS(G).

In the image display 1000, since the image represented by the image data DCS corrected by the gain corrector 120 is formed on the liquid crystal panel 160, the color unevenness that tends to arise in the displayed image can be suppressed as explained in the following.

Figs. 3(A) and 3(B) illustrate methods of color unevenness correction. To make the explanation easier, the levels of the color image data are defined as falling between 0 and 100. The red luminance level range is defined as $0K_r$ to $100K_r$, the green luminance level range as $0K_g$ to $100K_g$, and the blue luminance level range as $0K_b$ to $100K_b$. The coefficients K_r , K_g and K_b indicate the contribution of the light of the color concerned to the luminance of light exiting from the pixels. Their values are $K_r \doteq 0.299$, $K_g \doteq 0.587$ and $K_b \doteq 0.114$. If red, green and blue each has an image data level of 50, representing a gray image, the red, green and blue luminance levels of the image to be displayed are defined as $50K_r$, $50K_g$ and $50K_b$.

Fig. 3(A) illustrates occurrence of color unevenness in the case of applying the pixels with gray image data, i.e., image data in which each of red, green and blue has a level of 50. Specifically, the red, green and blue luminance levels at pixel P1 are $50K_r$, $50K_g$ and $50K_b$, which are the color luminance levels that should be displayed, but at pixel P2 the luminance level of red is $40K_r$, the luminance level of green is $45K_g$, and the luminance level of blue is $55K_b$, because of the characteristics of the pixel P2. Color unevenness is therefore present.

The situation is equivalent to a filter that multiplies red by $(40/50)$, green by $(45/50)$ and blue by $(55/50)$ being present at pixel P2. This leads to the conclusion that the color unevenness of Fig. 3(A) can be suppressed

by Method 1 shown in Fig. 3(B). In Method 1, the image data levels are corrected in advance so as to cancel out the luminance level changes produced by the equivalent filter. Specifically, the red, green and blue image data sets are multiplied by the reciprocals of the respective equivalent filter color gains (40/50), (45/50) and (55/50), i.e., by (50/40), (50/45) and (50/55). By this, the luminance levels disregarding the coefficients, (hereafter referred to simply as “luminance levels”) are corrected to 50 for all colors. As Method 1 can correct the luminance level of each color to its proper value, it can suppress color unevenness. Correction by Method 1 is complicated, however, because the image data sets for all possible colors have to be corrected.

In the present embodiment, therefore, color unevenness is suppressed by Method 2. Method 2 defines the luminance level of green as a reference and effects correction for making the luminance levels of red and blue equal to that of green. Specifically, the red image data set is multiplied by the ratio of the green luminance level to the red luminance level (45/40), and the blue image data set is multiplied by the ratio of the green luminance level to the blue luminance level (45/55), thus making the luminance level of all colors equal to the green luminance level of 45.

Hue and saturation of each color can be defined by chromaticity. In suppressing color unevenness, therefore, it suffices to make the chromaticity of the pixels experiencing color unevenness equal to the proper chromaticity. Taking only chromaticity into consideration, one can see that among lights differing in luminance there exist ones that are the same in chromaticity. For instance, the chromaticity of light whose individual colors have a luminance of 50 and the chromaticity of light whose individual colors have a luminance of 45 are in principle the same and the two lights are displayed as the same color, notwithstanding that

unevenness produced by Method 2 causes substantially no problem in practical application.

Method 2 was explained with regard to the case of adjusting the luminance levels of red and blue light to the luminance level of green light but either red or blue can be used the reference instead. Still, in view of the fact that green has the greatest effect on luminance among the three colors, green is preferably adopted as the reference. In a case where color images are formed using a combination of colors other than the three primary colors (red, green and blue), the same effects can be obtained by selecting one of the colors as a reference, particularly by selecting the color among them that has the greatest effect on luminance.

The correction gains $gr(x, y)$ and $gb(x, y)$ stored in the constant table 220 correspond to the ratio of pixel green luminance level to red luminance level and the ratio of pixel green luminance level to blue luminance level in Method 2. The gains are determined in the following manner:

- i) Image data representing a uniform gray image are output from the SC 110.
- ii) The chromaticity of each pixel is measured while varying the correction gains gr and gb applied to the multipliers 240 and 250 (Fig. 2) until the chromaticity of the pixel becomes equal to the proper gray chromaticity to be displayed.
- iii) The correction gains gr and gb when the chromaticity of the pixel becomes equal to the proper gray chromaticity are stored in the constant table 220 as $gr(x, y)$ and $gb(x, y)$ for position (x, y) of the pixel.

The procedure for determining the correction gains is not limited to the steps i) to iii) set out above. In i), an image of a color other than gray can be displayed instead of the uniform gray image. However, the image

should preferable be of a color including red, green blue. Although the chromaticity of every pixel is measured in ii), the procedure is not limited to this. For example, it is possible instead to measure the chromaticity of a pixel region consisting of multiple pixels including a prescribed pixel to
5 be measured and to use the measured chromaticity as the chromaticity of the prescribed pixel. This method is convenient because it is difficult to measure the chromaticity of individual pixels. Any procedure can be adopted that, during display of an image of uniform color, enables the correction gains of every pixel to be determined so as to reduce any
10 difference between the chromaticity of the pixel and the chromaticity of the color desired to be displayed.

As explained in the forgoing, the image display 1000 according to this embodiment is configured so that, during display of an image of uniform color, the image data supplied to the liquid crystal panel 160 can
15 be corrected in the gain corrector 120 so that the light exiting from every pixel is made to have the same chromaticity. It can therefore suppress color unevenness.

B. Second embodiment:

Fig. 4 is a block diagram schematically illustrating a gain corrector
20 120A of a second embodiment of this invention. An image display similar to that of the first embodiment can be configured by replacing the gain corrector 120 of the first embodiment with this gain corrector 120A.

The gain corrector 120A comprises a correction timing controller 210, a constant table 220A, a constant selector 230, a red multiplier 240, a
25 blue multiplier 250, an area detector 260 and a gain calculator 270.

The area detector 260 detects a segment (hereinafter called an "area" or "plane") that includes the pixel position (x, y) calculated by the correction timing controller 210. The meaning of "area" will be explained

Fourth area: $y - (Y02/X01) \cdot x < 0 \quad \dots (4b)$

When the result of the discrimination is the third area, the area detector 260 outputs area data $PLS = 010$ (decimal number: 2). When the
5 result is the fourth area, it outputs $PLS = 011$ (decimal number: 3).

Discrimination between the fifth area and the sixth area is carried out similarly to that between the third area and the fourth area while the pixel PD is used as the origin (0, 0). The number of pixels between pixel PD and pixel PE is defined as X03 (= XB - 0) and the number of lines between pixel PD and pixel PG is defined as Y03 (= YG - YD - 0). The discrimination is then made as shown by Equation (5a) and Equation (5b):

Fifth area: $y - (Y03/X03) \cdot x \geq 0 \quad \dots (5a)$

Sixth area: $y - (Y03/X03) \cdot x < 0 \quad \dots (5b)$

When the result of the discrimination is the fifth area, the area
 15 detector 260 outputs area data PLS = 100 (decimal number: 4). When the
 result is the sixth area, it outputs PLS = 101 (decimal number: 5).

Discrimination between the seventh area and the eighth area is carried out similarly to that between the first area and the second area. Specifically, pixel PE is defined as the origin (0, 0). The number of pixels between pixel PE and pixel PF is defined as X04 ($= X_C - X_B - 0$) and the number of lines between pixel PE and pixel PH is defined as Y04 ($= Y_G - Y_D - 0$). The discrimination is then made as shown by Equation (6a) and Equation (6b):

Seventh area: $y - \{- (Y04/X04) \cdot x + Y04\} < 0 \quad \dots (6a)$

25 Eighth area: $y - \{-(Y04/X04) \cdot x + Y04\} \geq 0 \quad \dots (6b)$

When the result of the discrimination is the seventh area, the area detector 260 outputs area data $PLS = 110$ (decimal number: 6). When the result is the eighth area, it outputs $PLS = 111$ (decimal number: 7).

The area detector 260 can thus detect the area including the pixel to be corrected in the foregoing manner.

Constants ar_i , br_i , cr_i , ab_i , bb_i and cb_i ($i = 1 - 8$) for use in gain calculation by the gain calculator 270 are stored in the constant table 220A of Fig. 4 for each area.

The constant selector 230 receives the area data PLS indicating the area discriminated by the area detector 260, selects the corresponding constants ar_i , br_i , cr_i , ab_i , bb_i and cb_i from the constant table 220A, and supplies them to the gain calculator 270.

The gain calculator 270 determines the correction gain for every pixel in the discriminated area (segment pixel) by linear interpolation from the correction gains of the pixels at the area apexes (apex pixels).

Figs. 7(A) and 7(B) show the gain calculation for pixels present in the first and second areas conducted in the gain calculator 270. As shown in Fig. 7(A), the pixel PA is used as the origin (0, 0) and the correction gain g of an arbitrary pixel $P(x, y)$ present in the first area is calculated by interpolation using Equation (7):

$$g = a1 \cdot x + b1 \cdot y + c1 \quad \dots (7)$$

Defining the correction gains of the apex pixels PA, PB and PD as gA , gB and gD , the number of pixels between pixel PB and pixel PA as $X01$ ($= XB - 0$), and the number of lines between pixel PD and pixel PA as $Y01$ ($= YD - 0$), the constants $a1$, $b1$ and $c1$ can be represented by Equations (8a) – (8c):

$$a1 = (gB - gA)/X01 \quad \dots (8a)$$

$$b1 = (gD - gA)/Y01 \quad \dots (8b)$$

$$c1 = gA \quad \dots (8c)$$

Therefore, defining the red constants as $ar1$, $br1$ and $cr1$ and the blue constants as $ab1$, $bb1$ and $cb1$, it follows from Equation (7) that the

equations for interpolating the red and blue correction gains gr and gb of an arbitrary pixel P(x, y) in the first area can be written:

$$gr = ar1 \cdot x + br1 \cdot y + cr1 \quad \dots (9a)$$

$$gb = ab1 \cdot x + bb1 \cdot y + cb1 \quad \dots (9b)$$

5 Defining the red correction gains of the apex pixels PA, PB and PD as gAr, gBr and gDr and defining the blue correction gains thereof as gAb, gBb and gDb, it follows from Equations (8a) – (8c) that the constants ar1, br1, cr1, ab1, bb1 and cb1 can be represented by Equations (10a) – (10f):

$$ar1 = (gBr - gAr)/X01 \quad \dots (10a)$$

$$10 \quad br1 = (gDr - gAr)/Y01 \quad \dots (10b)$$

$$cr1 = gAr \quad \dots (10c)$$

$$ab1 = (gBb - gAb)/X01 \quad \dots (10d)$$

$$bb1 = (gDb - gAb)/Y01 \quad \dots (10e)$$

$$cb1 = gAb \quad \dots (10f)$$

15 The correction gains of the apex pixels PA, PB and PD can be obtained in advance using the correction gain determining procedure explained with regard to the first embodiment.

As shown in Fig. 7(B), defining pixel PA as the origin (0, 0), the correction gain g of an arbitrary pixel P present in the second area can be
20 determined by interpolation using Equation (11):

$$g = a2 \cdot x + b2 \cdot y + c2 \quad \dots (11)$$

Defining the correction gains of the apex pixels PB, PD and PE as gB, gD and gE, the constants a2, b2 and c2 can be represented by Equations (12a) – (12c):

$$25 \quad a2 = (gE - gD)/X01 \quad \dots (12a)$$

$$b2 = (gE - gB)/Y01 \quad \dots (12b)$$

$$c2 = gD + gB - gE \quad \dots (12c)$$

Therefore, defining the red constants as ar2, br2 and cr2 and the blue constants as ab2, bb2 and cb2, it follows from Equation (11) that the equations for interpolating the red and blue correction gains gr and gb of an arbitrary pixel P(x, y) in the second area can be written:

$$5 \quad gr = ar2 \cdot x + br2 \cdot y + cr2 \quad \dots (13a)$$

$$gb = ab2 \cdot x + bb2 \cdot y + cb2 \quad \dots (13b)$$

Defining the red correction gains of the apex pixels PB, PD and PE as gBr, gDr and gEr and defining the blue correction gains thereof as gBb, gDb and gEb, it follows from Equations (12a) – (12c) that the constants
10 ar2, br2, cr2, ab2, bb2 and cb2 can be represented by Equations (14a) – (14f):

$$ar2 = (gEr - gDr)/X01 \quad \dots (14a)$$

$$br2 = (gEr - gBr)/Y01 \quad \dots (14b)$$

$$cr2 = gDr + gBr - gEr \quad \dots (14c)$$

$$15 \quad ab2 = (gEb - gDb)/X01 \quad \dots (14d)$$

$$bb2 = (gEb - gBb)/Y01 \quad \dots (14e)$$

$$cb2 = gDb + gBb - gEb \quad \dots (14f)$$

The correction gains of the segment pixels in the other areas can also be determined by interpolation from the correction gains of the apex
20 pixels of the area, similarly to what was explained with regard to the first and second areas. Fig. 8 is diagram showing examples of correction gain interpolation equations and constants stored in the constant table 220A for the respective areas. The interpolation equations and constants shown in Fig. 8 are non-limitative examples. They can be replaced by any of
25 various other interpolation equations and constants usable for interpolating the correction gains of the segment pixels from the apex pixels of the respective areas.

The gain calculator 270 thus determines the correction gains g_r and g_b for every pixel and supplies them to the red multiplier 240 and the blue multiplier 250.

The gain corrector 120A corrects given image data $DS(R)$, $DS(G)$ and $DS(B)$ and outputs them as image data $DCS(R)$, $DCS(G)$ and $DCS(B)$. The image represented by the image data DCS corrected by the gain corrector 120A is formed on the liquid crystal panel 160. As a result, an image suppressed in color unevenness is displayed.

In the second embodiment, the gain corrector 120A corrects the red and blue image data among the image data of every pixel so as to make their levels substantially equal to the level of the green image data. The color unevenness tending to occur in the displayed image can therefore be suppressed. Moreover, in the second embodiment, the pixels are divided into multiple areas beforehand and the correction gain of any given pixel present in an area is determined by interpolation from the correction gains of the apex pixels of the area. This is advantageous in not requiring the correction gains of all pixels to be calculated in advance. It is also advantageous in that it simplifies the procedure for determining the correction gains in advance and reduces the size of the constant table for storing data corresponding to the determined correction gains.

As shown in Fig. 5, the second embodiment defines the eight areas using the vertical line connecting pixels PB, PE and PH, the horizontal line connecting the pixels PD, PE and PF, and the sides of the rhombus having pixels PB, PD, PH and PF as its apexes. The distribution of color unevenness is generally such that the unevenness spreads radially outward from the image center toward the image periphery, and the area segmentation of the second embodiment is an example for coping with this distribution. However, the invention is not limited to this segmentation.

For example, one of the segmentations shown in Figs. 9 and 10 can be adopted. So long as the area segmentation is matched to the color unevenness distribution so as to enable the color unevenness within the areas to be suppressed by interpolation of pixel image data, it is not limited
5 with respect to the number or shape of the segments. The area pattern illustrated in Fig. 10 is what is obtained by using the set of areas of Fig. 5 as a unit for dividing the image horizontally and vertically into multiple identical sets. As this pattern enables the correction processing to be conducted by repeating the same processing for each set, it makes the
10 correction processing easier.

It is also possible to provide plural sets of the area detector 260 and the multiple gain calculator 270 for plural area segmentation patterns, provide means for selecting one set among them, and select an area segmentation pattern according to the color unevenness distribution
15 characteristics of the display. By this, color unevenness can be suppressed with higher precision in accordance with various color unevenness characteristics arising in different displays.

The present invention is in no way limited to the details of the examples and embodiments described in the foregoing but various changes
20 and modifications may be made without departing from the scope of the appended claims. For example, the following modifications are also possible.

(1) Although the foregoing embodiments were explained taking a projection display as an example, the invention can also be applied to a
25 direct viewing display.

(2) Although the foregoing embodiments were explained taking an image display that uses a liquid crystal panel as an example, the invention is not limited in application to such a display but can also be applied to a

display equipped with a PDM, DMD, CRT or any of various other display devices.

CONFIDENTIAL

WHAT IS CLAIMED IS:

1. An image display apparatus comprising:
an image processor for outputting image data including plural color
5 component data;
a gain corrector for correcting levels of the image data output by the
image processor; and
an image display device having a plurality of pixels from each of
whose pixels light for forming an image exits in accordance with the
10 corrected image data corrected by the gain corrector;
wherein the gain corrector corrects the level of at least one of the
plural color component data applied to the pixels in accordance with the
positions of the pixels such that, when image data representing an image of
a uniform color are output from the image processor, difference in
15 chromaticity of light exiting from the pixels is reduced among the pixels
without making luminance of the light exiting from the pixels of the image
display device the same at all pixels.
2. An image display apparatus according to claim 1, wherein the
20 gain corrector corrects the levels of all but a specific one of the plural color
component data applied to the pixels to reduce difference in level between
the specific color component data and the other color component data.
3. An image display apparatus according to claim 2, wherein the
25 specific color component data is the type of color component data that
makes the greatest contribution to the luminance of the light for forming
the image.

4. An image display apparatus according to claim 3, wherein the plural color component data are red, green and blue component data and the specific color component data is the green component data.

5 5. An image display apparatus according to claim 1, wherein the plurality of pixels are segmented into a plurality of small areas of polygonal shape;

correction values for apex pixels corresponding to apexes of the small blocks are determined in advance, and

10 correction values of pixels other than the apex pixels in each small areas are interpolated from the correction values of the apex pixels of the small area.

15 6. An image display apparatus according to claim 5, wherein the plurality of pixels are segmented into the plurality of small areas by drawing a horizontal line through a center pixel among the multiple pixels, drawing a vertical line through the center pixel, and drawing the sides of a rhombus whose apexes are the extremities of the horizontal line and the vertical line.

20

7. An image display method comprising the steps of:

(a) providing image data including plural color component data;

(b) correcting levels of the image data; and

25 (c) producing light representing an image at a plurality of pixels of an image display device in accordance with the corrected image data;

wherein the step (b) includes the step of correcting the level of at least one of the plural color component data applied to the pixels in accordance with the positions of the pixels such that, when image data

representing an image of a uniform color are output from the image processor, difference in chromaticity of light exiting from the pixels is reduced among the pixels without making luminance of the light exiting from the pixels of the image display device the same at all pixels.

5

8. An image display method according to claim 7, wherein the step of correcting the level of at least one of the plural color component data includes the step of correcting the levels of all but a specific one of the plural color component data applied to the pixels to reduce difference in
10 level between the specific color component data and the other color component data.

9. An image display method according to claim 8, wherein the specific color component data is the type of color component data that
15 makes the greatest contribution to the luminance of the light for forming the image.

10. An image display method according to claim 9, wherein the plural color component data are red, green and blue component data and
20 the specific color component data is the green component data.

11. An image display method according to claim 7, wherein the plurality of pixels are segmented into a plurality of small areas of polygonal shape;
25 correction values for apex pixels corresponding to apexes of the small blocks are determined in advance, and

correction values of pixels other than the apex pixels in each small areas are interpolated from the correction values of the apex pixels of the small area.

- 5 12. An image display method according to claim 11, wherein the plurality of pixels are segmented into the plurality of small areas by drawing a horizontal line through a center pixel among the multiple pixels, drawing a vertical line through the center pixel, and drawing the sides of a rhombus whose apexes are the extremities of the horizontal line and the
- 10 vertical line.

ABSTRACT OF DISCLOSURE

The image display apparatus comprises: an image processor for outputting image data including plural color component data; a gain corrector for correcting levels of the image data output by the image processor; and an image display device having a plurality of pixels from each of whose pixels light for forming an image exits in accordance with the corrected image data corrected by the gain corrector. The gain corrector corrects the level of at least one of the plural color component data applied to the pixels in accordance with the positions of the pixels such that, when image data representing an image of a prescribed uniform color are output from the image processor, difference in chromaticity of light exiting from the pixels is reduced among the pixels without making luminance of the light exiting from the pixels of the image display device the same at all pixels.

Fig. 1

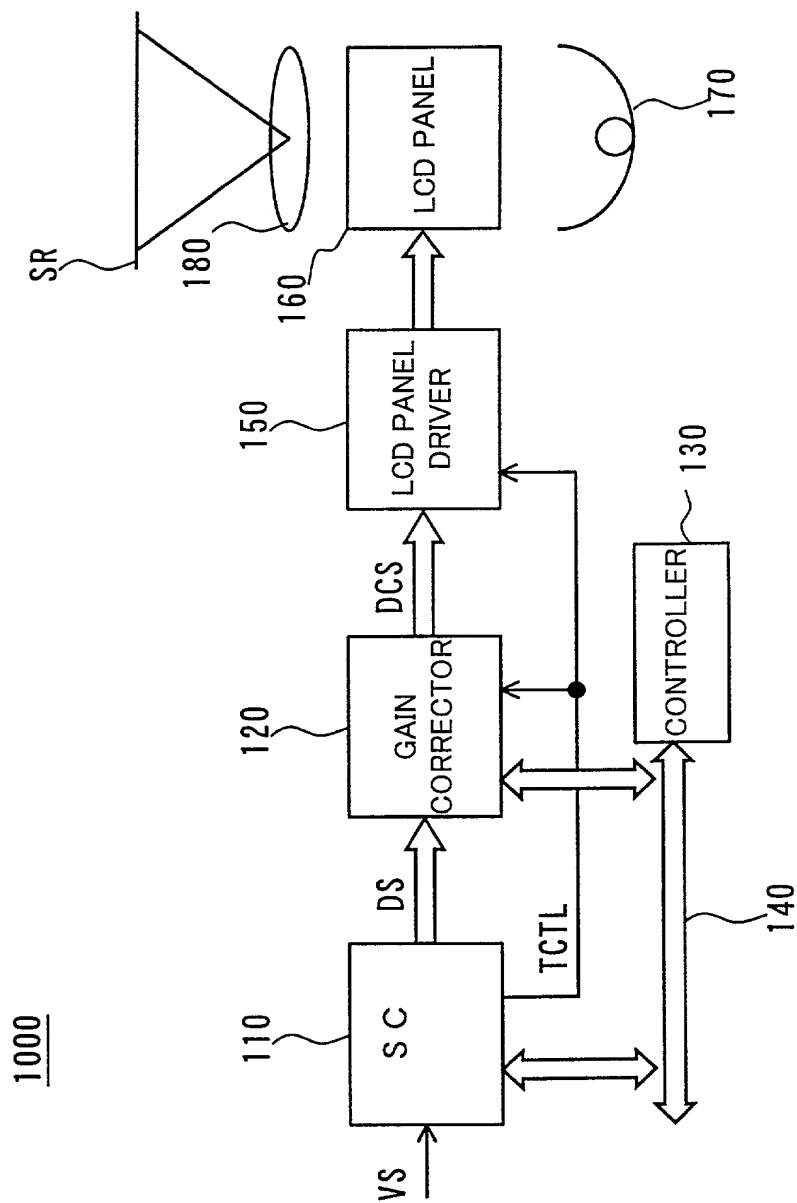


Fig. 2

120

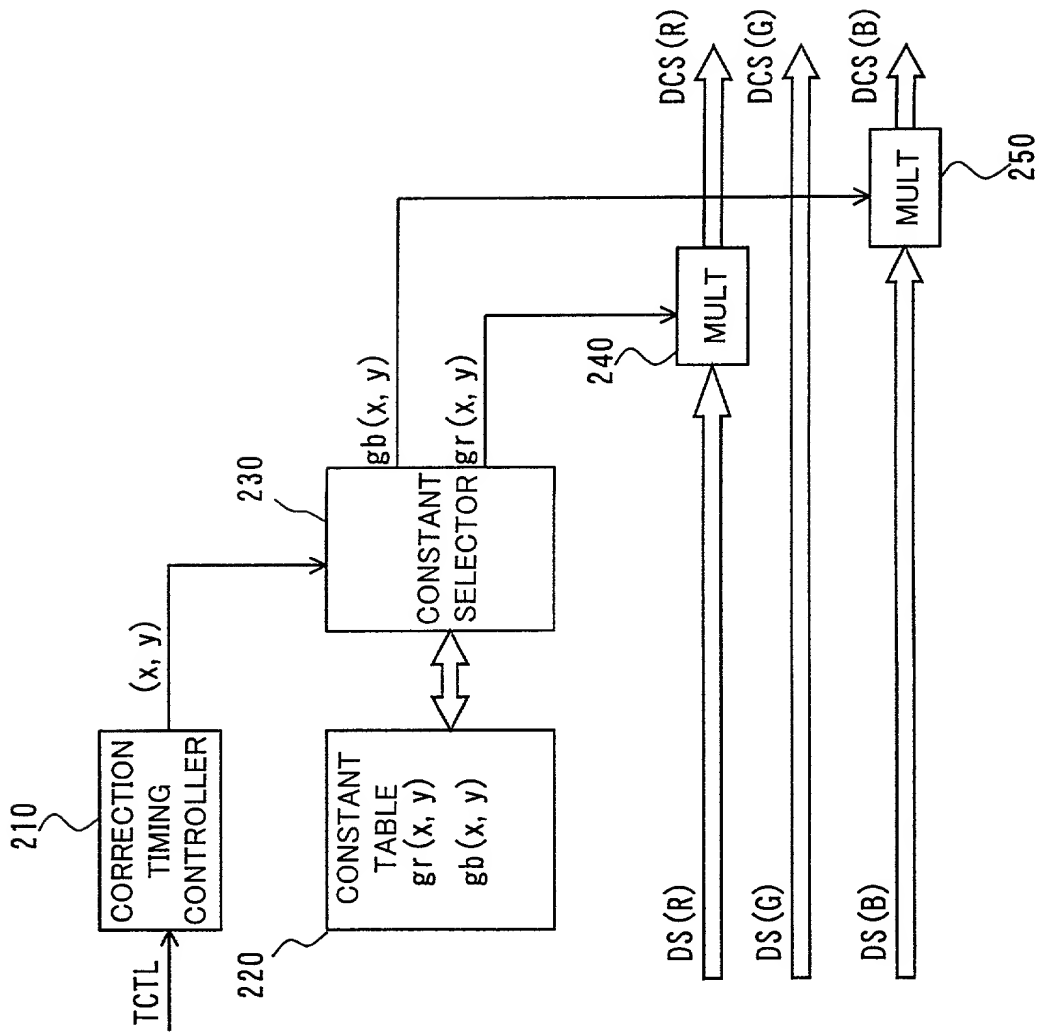


Fig. 3(A)

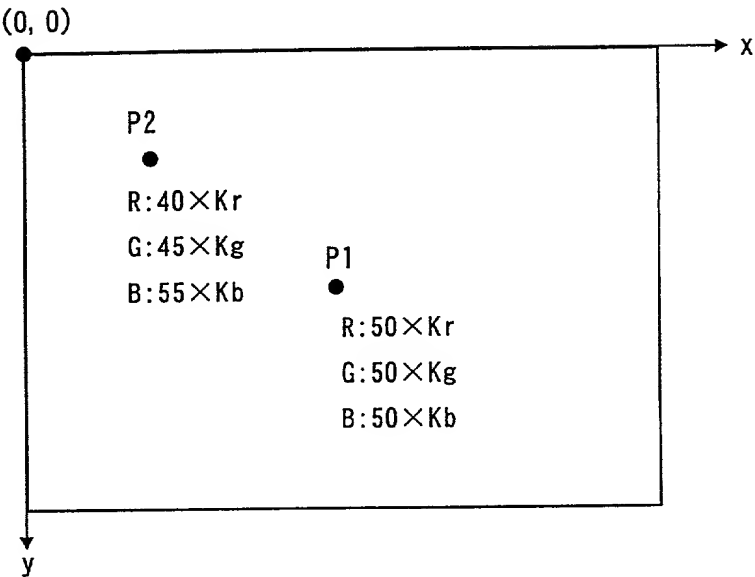
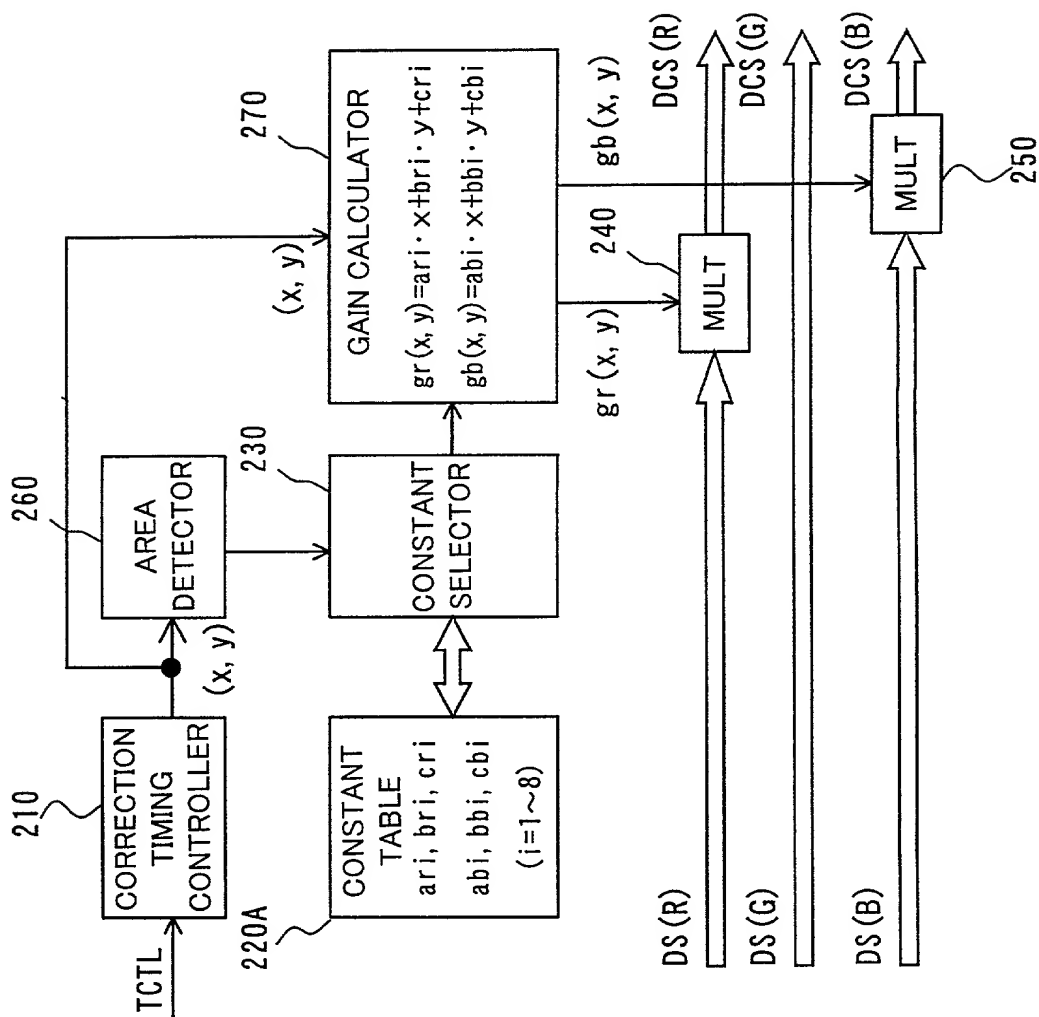


Fig. 3(B)

	<u>SIGNAL LEVEL</u>	<u>CORRECTION FACTOR (GAIN)</u>	<u>LUMINANCE LEVEL CHANGE (FILTER CHARACTERISTICS)</u>	<u>LUMINANCE LEVEL</u>
METHOD 1	DS (R) : 50	$\times (50/40)$	$\times (40/50)$	R: $50 \times K_r$
	DS (G) : 50	$\times (50/45)$	$\times (45/50)$	G: $50 \times K_g$
	DS (B) : 50	$\times (50/55)$	$\times (55/50)$	B: $50 \times K_b$
Jr				
METHOD 2 (EMBODIMENT)	DS (R) : 50	$\times (45/40)$	$\times (40/50)$	R: $45 \times K_r$
	DS (G) : 50	$\times 1$	$\times (45/50)$	G: $45 \times K_g$
	DS (B) : 50	$\times (45/55)$	$\times (55/50)$	B: $45 \times K_b$

Fig. 4

120A



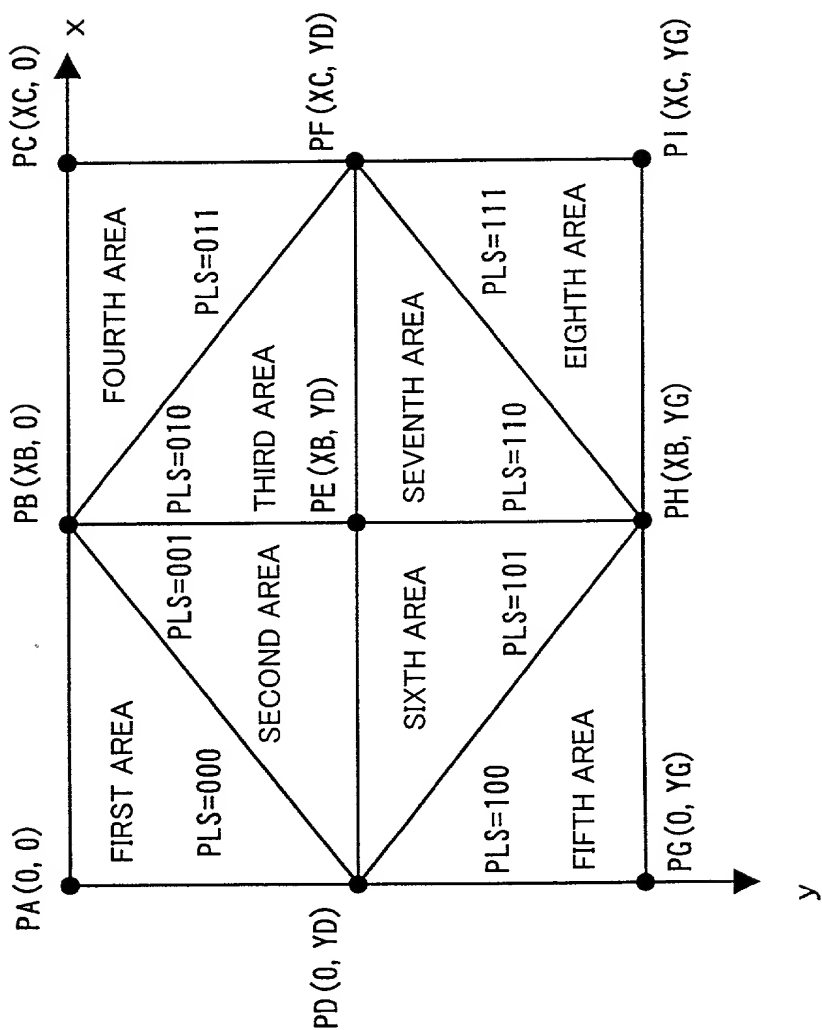


Fig. 5

FILE T 317 " 4E 426560

Fig. 6(A)

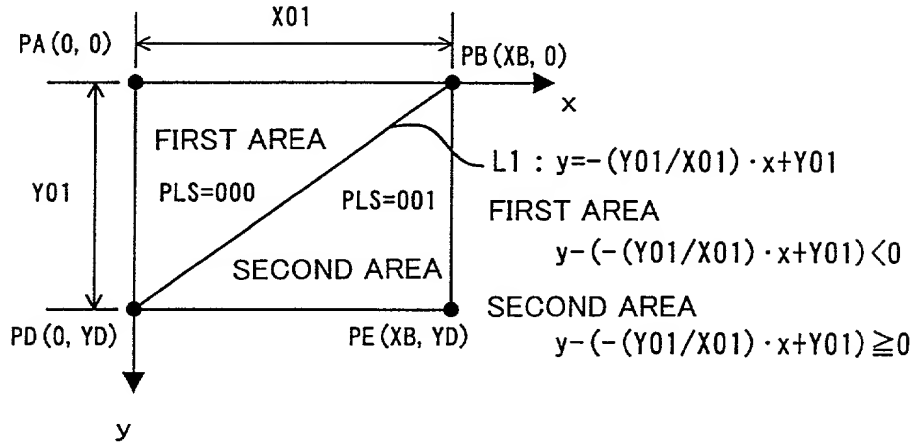


Fig. 6(B)

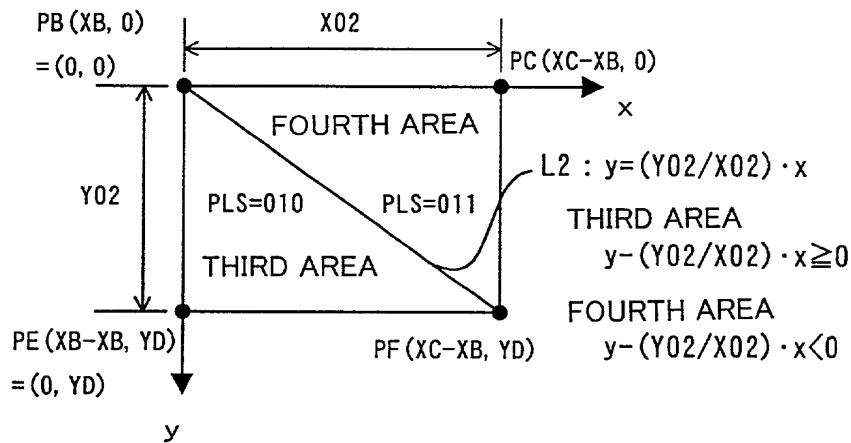


Fig. 7(A)

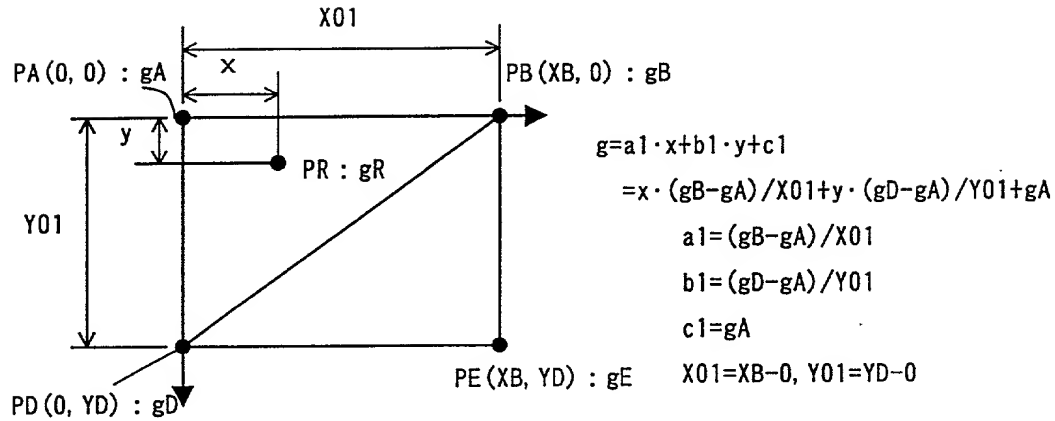


Fig. 7(B)

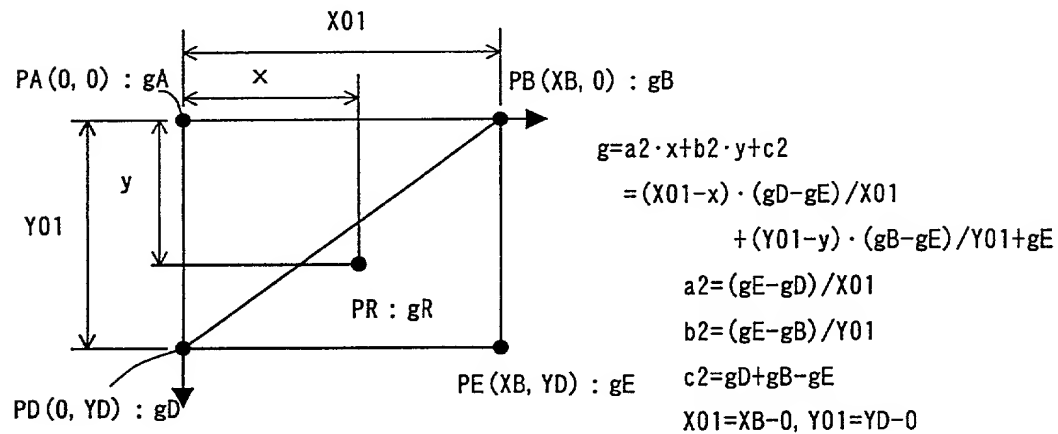


Fig. 8

AREA	RED GAIN	BLUE GAIN
1	$gr = ar1 \cdot x + br1 \cdot y + cr1$ $ar1 = (gBr - gAr) / X01$ $br1 = (gDr - gAr) / Y01$ $cr1 = gAr$ $X01 = XB - 0, Y01 = YD - 0$	$gb = ab1 \cdot x + bb1 \cdot y + cb1$ $ab1 = (gBb - gAb) / X01$ $bb1 = (gDb - gAb) / Y01$ $cb1 = gAb$ $X01 = XB - 0, Y01 = YD - 0$
2	$gr = ar2 \cdot x + br2 \cdot y + cr2$ $ar2 = (gEr - gDr) / X01$ $br2 = (gEr - gBr) / Y01$ $cr2 = gDr + gBr - gEr$ $X01 = XB - 0, Y01 = YD - 0$	$gb = ab2 \cdot x + bb2 \cdot y + cb2$ $ab2 = (gEb - gDb) / X01$ $bb2 = (gEb - gBb) / Y01$ $cb2 = gDb + gBb - gEb$ $X01 = XB - 0, Y01 = YD - 0$
3	$gr = ar3 \cdot x + br3 \cdot y + cr3$ $ar3 = (gFr - gEr) / X02$ $br3 = (gEr - gBr) / Y02$ $cr3 = gBr$ $X02 = XC - XB, Y02 = YD - 0$	$gb = ab3 \cdot x + bb3 \cdot y + cb3$ $ab3 = (gFb - gEb) / X02$ $bb3 = (gEb - gBb) / Y02$ $cb3 = gBb$ $X02 = XC - XB, Y02 = YD - 0$
4	$gr = ar4 \cdot x + br4 \cdot y + cr4$ $ar4 = (gCr - gBr) / X02$ $br4 = (gFr - gCr) / Y02$ $cr4 = gBr$ $X02 = XC - XB, Y02 = YD - 0$	$gb = ab4 \cdot x + bb4 \cdot y + cb4$ $ab4 = (gCb - gBb) / X02$ $bb4 = (gFb - gCb) / Y02$ $cb4 = gBb$ $X02 = XC - XB, Y02 = YD - 0$
5	$gr = ar5 \cdot x + br5 \cdot y + cr5$ $ar5 = (gHr - gGr) / X03$ $br5 = (gGr - gDr) / Y03$ $cr5 = gDr$ $X03 = XB - 0, Y03 = YG - YD$	$gb = ab5 \cdot x + bb5 \cdot y + cb5$ $ab5 = (gHb - gGb) / X03$ $bb5 = (gGb - gDb) / Y03$ $cb5 = gDb$ $X03 = XB - 0, Y03 = YG - YD$
6	$gr = ar6 \cdot x + br6 \cdot y + cr6$ $ar6 = (gEr - gDr) / X03$ $br6 = (gHr - gEr) / Y03$ $cr6 = gDr$ $X03 = XB - 0, Y03 = YG - YD$	$gb = ab6 \cdot x + bb6 \cdot y + cb6$ $ab6 = (gEb - gDb) / X03$ $bb6 = (gHb - gEb) / Y03$ $cb6 = gDr$ $X03 = XB - 0, Y03 = YG - YD$
7	$gr = ar7 \cdot x + br7 \cdot y + cr7$ $ar7 = (gFr - gEr) / X04$ $br7 = (gHr - gEr) / Y04$ $cr7 = gEr$ $X04 = XC - XB, Y04 = YG - YD$	$gb = ab7 \cdot x + bb7 \cdot y + cb7$ $ab7 = (gFb - gEb) / X04$ $bb7 = (gHb - gEb) / Y04$ $cb7 = gEb$ $X04 = XC - XB, Y04 = YG - YD$
8	$gr = ar8 \cdot x + br8 \cdot y + cr8$ $ar8 = (gIr - gHr) / X04$ $br8 = (gIr - gFr) / Y04$ $cr8 = gHr + gFr - gIr$ $X04 = XC - XB, Y04 = YG - YD$	$gb = ab8 \cdot x + bb8 \cdot y + cb8$ $ab8 = (gIb - gHb) / X04$ $bb8 = (gIb - gFb) / Y04$ $cb8 = gHb + gFb - gIb$ $X04 = XC - XB, Y04 = YG - YD$

DOCKET # 192909US2

Fig. 9(A)

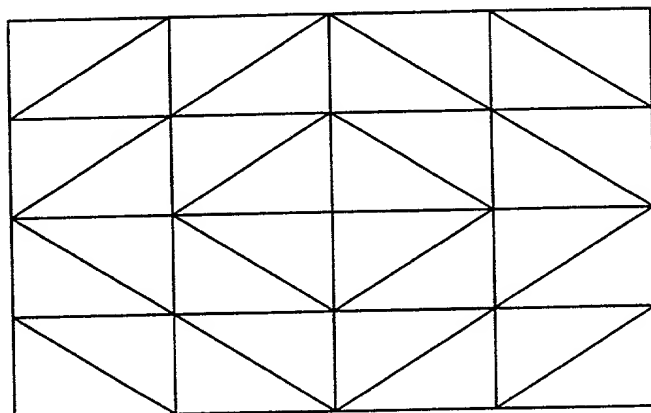


Fig. 9(B)


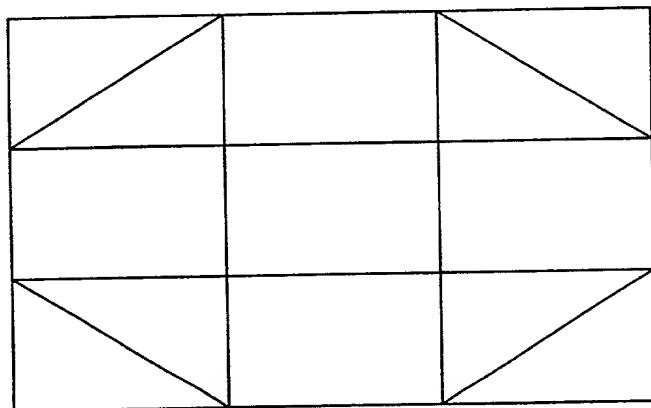


Fig. 10

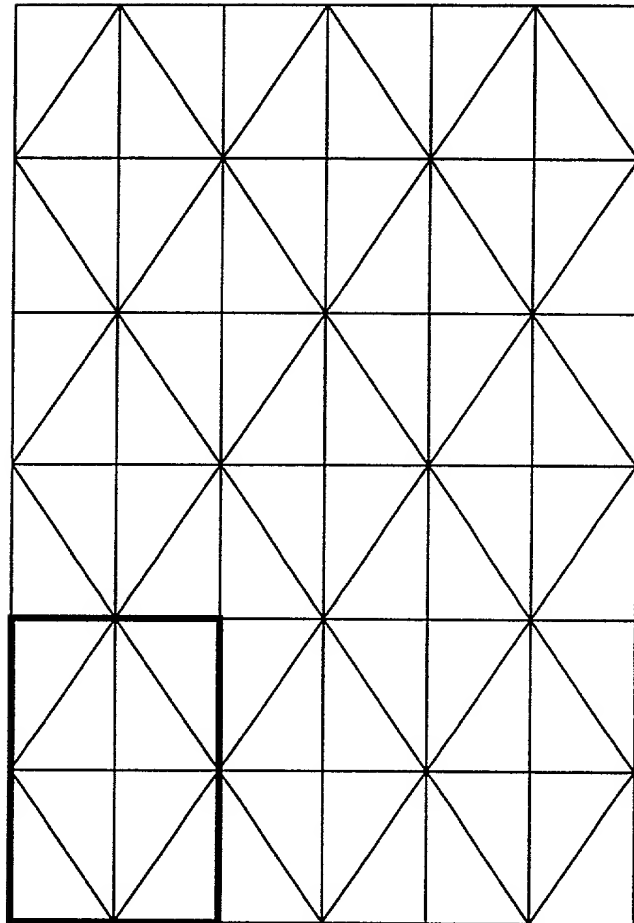

Docket No. 192909US2

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

IN RE APPLICATION OF: Fumio KOYAMA

FILING DATE: Herewith

FOR: COLOR CORRECTION IN IMAGE DISPLAY

LIST OF INVENTOR'S NAME AND ADDRESS

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:

Listed below is the name and address of the inventor for the above-identified patent application.

Fumio KOYAMA

Tokyo, Japan

A declaration containing all the necessary information will be submitted at a later date.

Respectfully Submitted,

OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P.C.



Marvin J. Spivak

Registration No. 24,913

C. Irvin McClelland
Registration Number 21,124



22850

Tel. (703) 413-3000
Fax. (703) 413-2220
(OSMMN 11/98)